




Car	Audi TT Quattro 2.0 TFSi	Part No.	SAU085C
Year	2014-Current	Fit Kits	310FK
Notes	Where not supplied use original fittings	Features	Pipe Diameter:- 76mm


Estimated Fitting Time: 90 Minutes

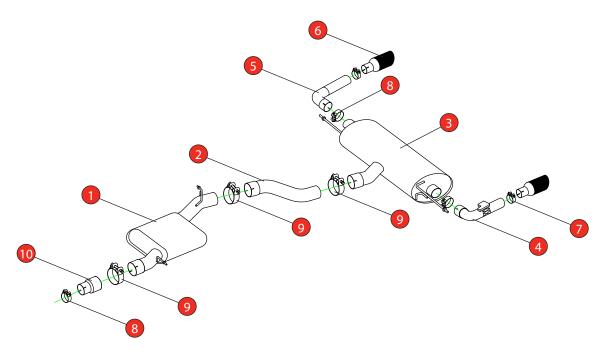

NO.	PART NO.	DESCRIPTION	QTY	
1	740AU	Resonated Centre Section	1	
2	742AU	Link Pipe	1	
3	743AU	Rear Silencer	1	
4	744AU	L/H Valved Trim Connecting Pipe	1	
5	745AU	R/H Trim Connecting Pipe	1	
6	Z023.10055	Black Ceramic Coated Daytona Trim	2	
Fit Kit				
7	Z016.10064	63-68mm Clamp	2	
8	Z016.10070	65mm H/D Clamp	3	
9	Z016.10062	79mm H/D Clamp	3	
10	AD62	Adaptor (USE TO FIT TO O.E SYSTEM)	1	

E-MARK	N/A
DATE	04/07/18
ISSUE	00
AUTHORISED	M.Ydlibi

NOTE: ENSURE SCORPION SYSTEM IS CLEAR OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.

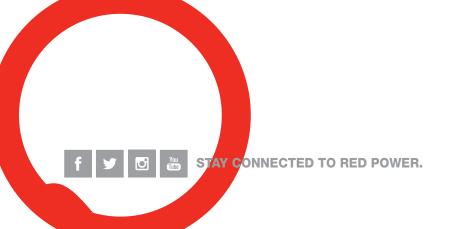










Car	Audi TT Quattro 2.0 TFSi	Part No.	SAU085C
Year	2014-Current	Fit Kits	310FK
Notes	Where not supplied use original fittings	Features	Pipe Diameter:- 76mm





A) After you have removed O.E exhaust you will need to swap the valve motor to the Scorpion exhaust. Remove the 3 nuts (keep safe as you will need them to bolt the electronic valve motor to Scorpion Exhaust).





- B) Lift up the motor. You will now be able to see the torsion spring (This must stay on the electronic valve motor to work with Scorpion Exhaust).
- C) Rotate Scorpion valve so it aligns with the torsion spring.
- D) Now fit the O.E electronic valve motor ensuring the spring seats correctly to the lugs of the valve.
- E) Using the 3 O.E nuts secure in place.



Once happy with fitment of Scorpion Exhaust, fully tighten up all clamps and fixing and plug in the electronic valve motors.