




Car	Audi TTRS 8S MK3 (GPF models only)	Part No.	SAUS081CF
Year	2019-Current	Fit Kits	391FK
Notes	Where not supplied use original fittings	Features	Pipe Diameter:- 80mm

Estimated Fitting Time: 1 Hour 30 Minutes

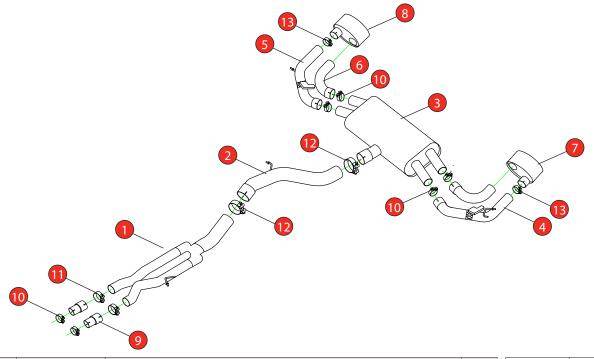

NO.	PART NO.	DESCRIPTION	QTY	
1	860AU	Non-resonated Centre Section	1	
2	731AU	Link Pipe	1	
3	732AU	Rear Silencer	1	
4	733AU	L/H Valved Outer Trim Connecting Pipe	1	
5	734AU	R/H Valved Outer Trim Connecting Pipe	1	
6	861AU	L/H & R/H Inner Trim Connecting Pipe	2	
7	Z023.10160	L/H Carbon Ascari Evo Trim	1	
8	Z023.10161	R/H Carbon Ascari Evo Trim	1	
Fit Kit				
9	AD71	Adaptor	2	
10	Z016.10070	65mm H/D Clamp	6	
11	Z016.10063	72mm H/D Clamp	2	
12	Z016.10069	79-85mm H/D Clamp	2	
13	Z016.10064	63-68mm H/D Clamp	2	

DATE	03/05/2022
ISSUE	00
AUTHORISED	S Shipley

SYSTEM IS CLEAR OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.



















Car	Audi TTRS 8S MK3 (GPF models only)	Part No.	SAUS081CF
Year	2019-Current	Fit Kits	391FK
Notes	Where not supplied use original fittings	Features	Pipe Diameter:- 80mm

Estimated Fitting Time: 1 Hour 30 Minutes









- - - STAY CONNECTED TO RED POWER.

- A) Remove the electronic actuator from the original exhaust.
- B) On the scorpion product fit the fixing bow into the valve and use the actuator to secure the bow in place.
- C) Use the M6 bolts and washers to fasten the actuator to the valve ensuring the two straights on the fixing bow fit between the grooves on both of the posts.
- D) Before fitting the Scorpion system, you must rotate the rear mounts by 180° on both sides of the car.