




Car	Ford Fiesta ST MK8	Part No.	SFDS105
Year	2018 - September 2020	Fit Kits	331FK
Notes	Where not supplied use original fittings. The original exhaust requires cutting. Valve requires lubricating every 3-4 months with WD40	Features	Pipe Diameter:- 70mm


Estimated Fitting Time: 60 Minutes

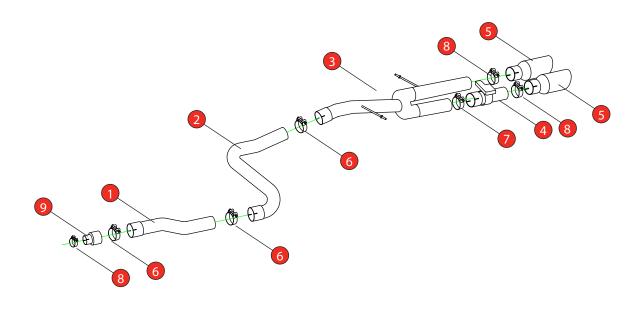

NO.	PART NO.	DESCRIPTION	QTY	
1	1291FD	Centre Section	1	
2	1323FD	Link Pipe	1	
3	1322FD	Predator Rear Silencer Delete	1	
4	1299FD	Valved Trim Connecting Pipe	1	
5	Z023.10062	Polished Daytona Trim	2	
Fit Kit				
6	Z016.10063	72mm H/D Clamp	3	
7	Z016.10070	66mm H/D Clamp	1	
8	Z016.10064	63-68mm Clamp	3	
9	AD03	Adaptor	1	
10	Z017.12783	Valve Spring	1	
11	Z016.10057	Mounting Rubber	3	

HOMOLOGATED	NO	
DATE	08/08/2022	
ISSUE	00	
AUTHORISED	S Shipley	

NOTE: ENSURE SCORPION SYSTEM IS CLEAR OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.

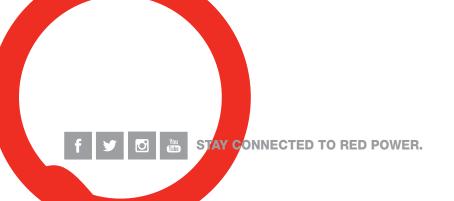



## **SCORPION // FITTING INSTRUCTIONS**





Car	Ford Fiesta ST MK8	Part No.	SFDS105
Year	2018 - September 2020	Fit Kits	380FK
Notes	Where not supplied use original fittings. The original exhaust requires cutting. Valve requires lubricating every 3-4 months with WD40	Features	Pipe Diameter:- 70mm


Estimated Fitting Time: 60 Minutes





Before removing the original system disconnect the exhaust valve.

To remove the original exhaust the system requires cutting in two places.







B) To remove the rest of the original GPF back system cut 80mm from the centre mounting bracket. De-bur this edge as the Scorpion adaptor will fit over it.





C) On the scorpion product fit the fixing bow into the valve and use the actuator to secure the bow in place.

D) Use the M6 bolts and washers to fasten the actuator to the valve ensuring the two straights on the fixing bow fit between the grooves on both of the posts.

